


Features:

- Send PS/2 Keyboard and mouse via one CAT5 UTP cable.
- Includes PS2100CT Transmitter and PS2100CR Receiver.
- Transmitter: Dual 6-pin mini DIN female for keyboard/mouse side to RJ-45.
- Receiver: Dual 6-pin mini DIN male with 6" lead for PC side to RJ-45.
- Passive; No power required.
- Transmission range up to 300ft / 100m.
- Used in pairs and easy connection.
- Applications for classroom projector systems, boardroom systems, collaborative PC systems and medical information systems.





Wiring Diagram:


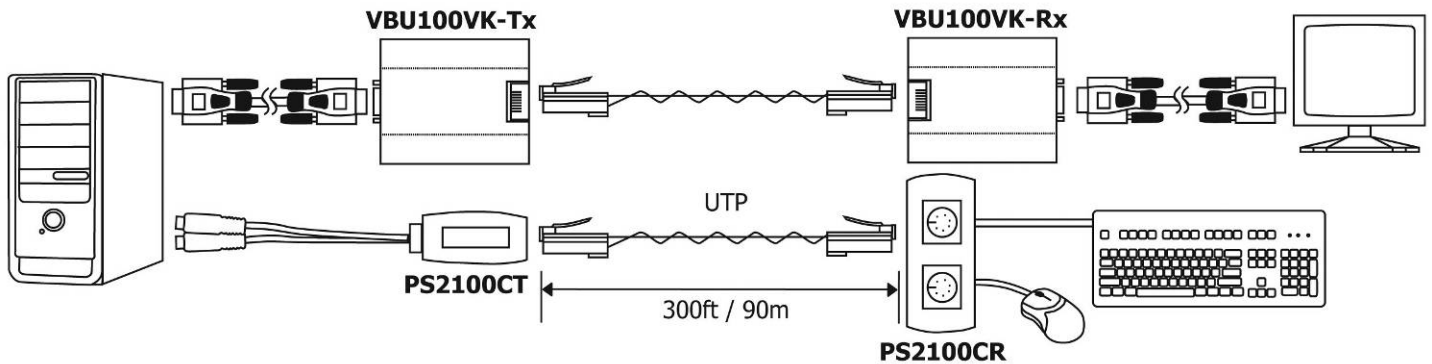


Panel View:

PS2100CT

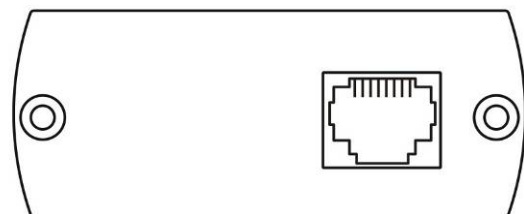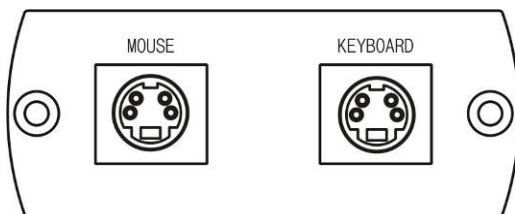

PS2100CR

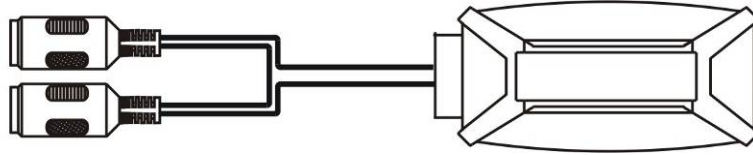

Specification:

Model Number	PS2100CT	PS2100CR
Input	PS/2 keyboard/mouse	
Bandwidth	DC to 1Mhz	
Link Signals	Mouse data, mouse clock, keyboard data, keyboard clock, VCC, ground	
Distance	300ft / 100m	
Cable	UPT / CAT5 cable (AWG24)	
RJ45 Pin Configuration	Keyboard: pin 1, pin 2	
	Mouse: pin 7, pin8	
Color Code	Keyboard: Purple	
	Mouse: Green	
Temperature	Operation: 0 ~ 55°C, Storage: -20 ~ 85°C, Humidity: up to 95%	
Dimensions W x H x D mm	43 x 67 x 27mm	69 x 25 x 22mm
Weight	100g	35g
PS2 Cable	150mm	

FCC CE C-TICK