



4 Channel Passive Video Balun w/ Power & Data

Model: VB444T




Features:


- 4 x female BNC + 1 x DC power + 4 x RJ-45 female + 2-pin terminal for DATA.
- Video, camera power, data (RS422, 485) transmission over one standard CAT 5 cable.
- Built-in PTC fuse for short protection.
- Application for B/W video signal up to 2000ft / 600m, and color video signal up to 1200ft / 400m.
- VB444T is used with VBU111RJ to transmit 4-channel video, power, and data over 4 CAT 5 cable.




Wiring Diagram:

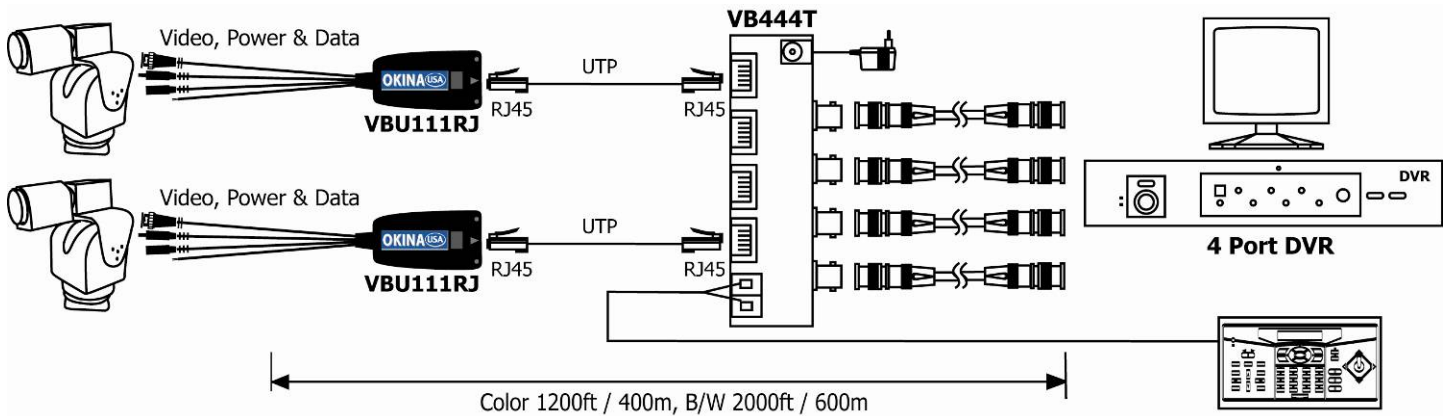

Panel View: VB444T



Front View



Rear View

Specification:

Model Number	VB444T
Video Input / Output	4x RJ-45 / 4x BNC Female
Video Signal	4 (1V p-p, 75 Ohms)
Transmission Distance	2000ft / 600m (B/W), 1200ft / 400m (Color)
Data Connector	1 Screw Type Terminal
Cable	UTP / Twisted Pair CAT5 (AWG24)
Power	12V DC
Dimensions W X H X D mm	138 x 66 x 28 with 5" power lead

FCC

CE

C-TICK

Voltage Drop According to Cable Length (24AWG):

Voltage	15V DC											
Range	50M			100M			300M			600M		
Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	14.4	14.7	14.8	13.8	14.3	14.6	11.9	13.6	14	X	12	12.9
100mA	14	14.5	14.5	12.7	13.8	14.2	X	12.2	13.1	X	X	11.1
150mA	13.5	14.2	14.3	12	13.4	13.9	X	11.1	12.3	X	X	X
200mA	12.6	14	14.2	11.3	12.9	13.6	X	X	11.5	X	X	X
250mA	12.1	13.7	14	10.3	12.4	13.2	X	X	X	X	X	X
300mA	11.8	13.5	13.8	X	12	12.9	X	X	X	X	X	X
350mA	11.3	13.3	13.7	X	11.7	12.7	X	X	X	X	X	X
400mA	10.8	13	13.5	X	11.2	12.4	X	X	X	X	X	X
450mA	X	12.7	13.3	X	10.7	12.1	X	X	X	X	X	X
500mA	X	12.4	13.1	X	X	11.6	X	X	X	X	X	X

Voltage	24V DC											
Range	50M			100M			300M			600M		
Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	23.8	23.8	23.8	23	23.5	23.6	21	22.4	23	18.1	21.2	22.1
100mA	23.6	23.4	23.5	22.4	23.1	23.3	18.7	21.1	22.2	12.9	18.7	20.4
150mA	22.6	23.2	23.3	21.3	22.6	22.9	16.2	20	21.3	X	16.1	18.9
200mA	22.1	22.9	23.1	20.3	22	22.5	13.7	18.1	20.5	X	13.5	17.1
250mA	21.6	22.6	22.9	19.4	21.6	22.2	10.9	17.4	19.6	X	11.1	15.4
300mA	21.1	22.4	22.7	18.4	21.2	21.9	X	16.1	18.8	X	X	13.8
350mA	20.6	22.1	22.5	17.5	20.6	21.6	X	15	18.1	X	X	12.2
400mA	20.2	21.8	22.3	16.5	20.1	21.2	X	13.9	17.3	X	X	10.7
450mA	19.7	21.6	22.1	15.5	19.6	20.9	X	12.7	16.6	X	X	X
500mA	19.1	21.3	21.9	14.5	19.1	20.5	X	11.3	15.4	X	X	X