


Features:

- Specially designed for CCTV color monitor.
- Support NTSC M/N, PAL M/N, PAL, NTSC 4.43 and SECAM video system.
- Compact size with plug and play installation.
- On screen display function.
- Brightness, Contrast, Color, NTSC Tint Control.
- Resolution: NTSC: 640 x 480; PAL: 768 x 576.
- PAL, NTSC auto configure.
(NTSC system for CRT/LCD monitor, PAL system for CRT monitor only).
- Power Supply Included.



Wiring Diagram:

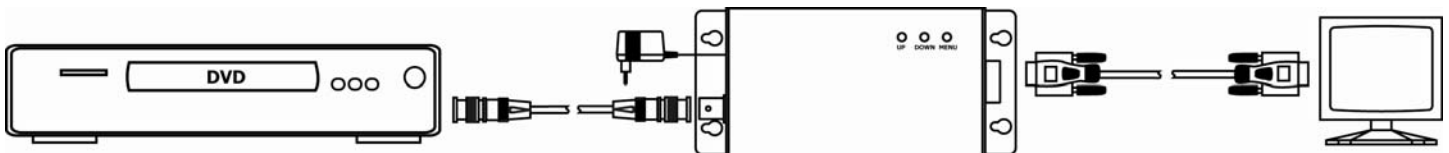

Panel View:



Specification:

Model Number	VC100V
Input / Output Signal	Composite Video, 1 Vp-p 75 ohm RCA Jack / VGA: 0.7 Vp-p RGB, 15 pin D female connector
Power	5V DC / 500mA
Power Consumption	200mA
Dimensions W x H x D mm	145 x 67 x 27mm
Weight g	220g

FCC CE C-TICK

Operation Controls and Function:

1. Menu Button: Push the button to choose which function to be adjusted (Tint, color, brightness, and contrast).

Tint Indicator: Light when tint is adjusted

Color Indicator: Light when color is adjusted.

Bright Indicator: Light when brightness is adjusted.

Contrast Indicator: Light when contract is adjusted.

2. Down Button: Press this button for reducing picture effects value.
3. Up Button: Press this button for adding picture effects value.

NOTE: If the picture is abnormal at the first setting on the LCD monitor, please adjust your LCD for normal picture.